

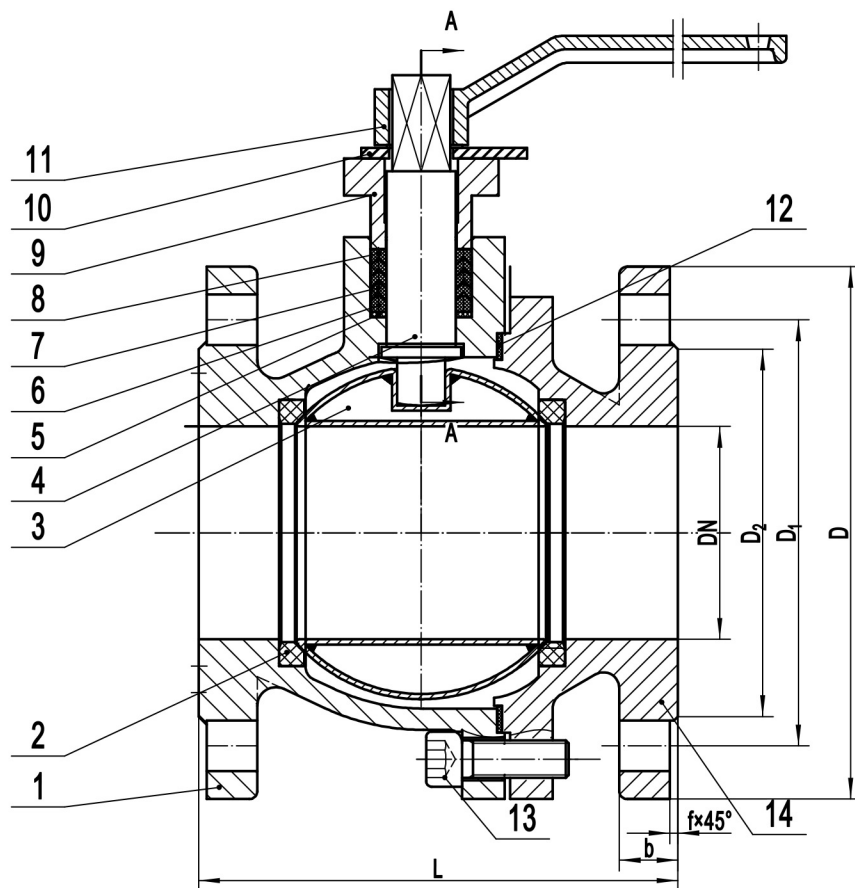
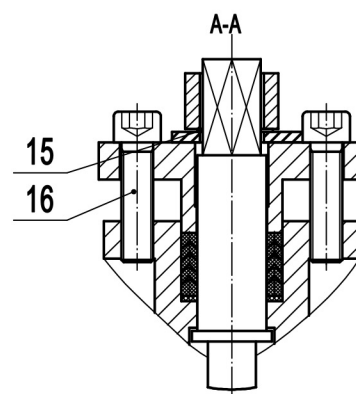


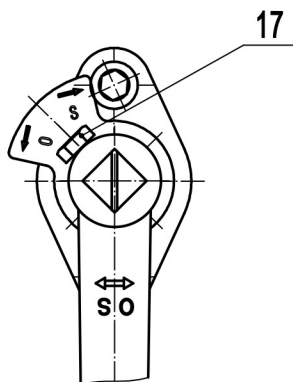

- 1.FLANGED:BS EN1092-2-1997;
2.TEST: EN12266-1-2012;
3.FACE TO FACE:EN588-2005 TYPE1b-27;

DN	L	D	D ₂	D ₁	b	f	Z-Ød
40	140±2	150	110	88	18	3	4-Ø19
50	150±2	165	125	102	20	3	4-Ø19
65	170±2	185	145	122	20	3	4-Ø19
80	180±2	200	160	138	22	3	8-Ø19
100	190±2	220	180	158	24	3	8-Ø19
125	325±2	250	210	188	26	3	8-Ø19
150	350±2	285	240	211	26	3	8-Ø23
200	400±2	340	295	266	30	3	12-Ø23



SIZE	DN40-200	
PRESSURE/MPa	1.6	
TEM/°C	0~200	
TEST/MPa	SEALING(WATER)	1.76
	STRENGTH(WATER)	2.4
MEDIUM	WATER/STEAM/OIL	

17	BOLT	STEEL(35#)
16	SCREW	STEEL(35#)
15	GASKET	65Mn
14	BODY	GG25
13	SCREW	STEEL(35#)
12	GASKET	PTFE
11	LEVER	DUCTILE IRON(QT450-10)
10	PLATE	STEEL(Q235)
9	GLAND	DUCTILE IRON(QT450-10)
8	PACKING	PTFE
7	PACKING	PTFE
6	PACKING	PTFE
5	GASKET	STEEL(Q235)
4	STEM	2Cr13
3	BALL	SS304
2	SEALING	PTFE
1	BODY	GG25
NO.	NAME	MATERIAL



DIN CAST IRON BALL VALVE